

EXS-158-PLUS




High performance automatic strapping machine

FEATURES


- Fully automatic strapping machine
- Automatic or manual launch
- Extremely precise electronic strap tension adjustment protects the parcels and guarantees an optimal strapping
- Fast and efficient with 37 strapping operations per minute
- Strap end detection with ejection of remaining strap or strap loop in case of empty strapping
- Robustness, reliability and very low maintenance thanks to its motor direct driving system
- Drive motor without chain or belt
- Remarkably silent
- Weld cooling delay comes standard
- Motor starts only when the strap is inserted
- Control panel with LED display that can be moved 180° on each side of the strapping machine
- Fitted with four swivel castors with brake



WIDTH OF THE STRAP USED
TO BE SPECIFIED WHEN ORDERING

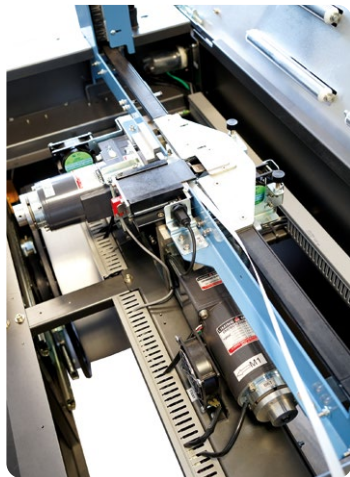

Control panel

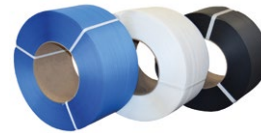

PP strapping
(see page 17)

**ARCH INTERIOR
DIMENSIONS: 858 X 610 MM**
OTHER DIMENSIONS AVAILABLE
UPON REQUEST, PLEASE CONTACT US

| Model | | EXS-158-PLUS |
|-------------------------|----|-------------------|
| Strapping width | mm | 9/12/15 |
| Strapping mandrel | mm | Ø 200 |
| Tension force | kg | 5 to 65 |
| Power supply | V | 220 single-phase |
| Engine power | kw | 0,60 |
| Arch dimensions (W x H) | mm | 858 x 610 |
| Dimensions (L x W x H) | mm | 1130 x 619 x 1535 |
| Weight | kg | 180 |

