


HY



Low-profile electric lift table 1000 to 2000 kg

FEATURES

- Super-low lifting table
- Excellent overall robustness
- Fitted with high-end components
- Bucher hydraulic electro-pump
- Safety clearance to prevent trapping during operation
- Self-lubricated rollers and bushings
- Hose burst valve
- 24V control voltage, push-button handle controller and dead man switch

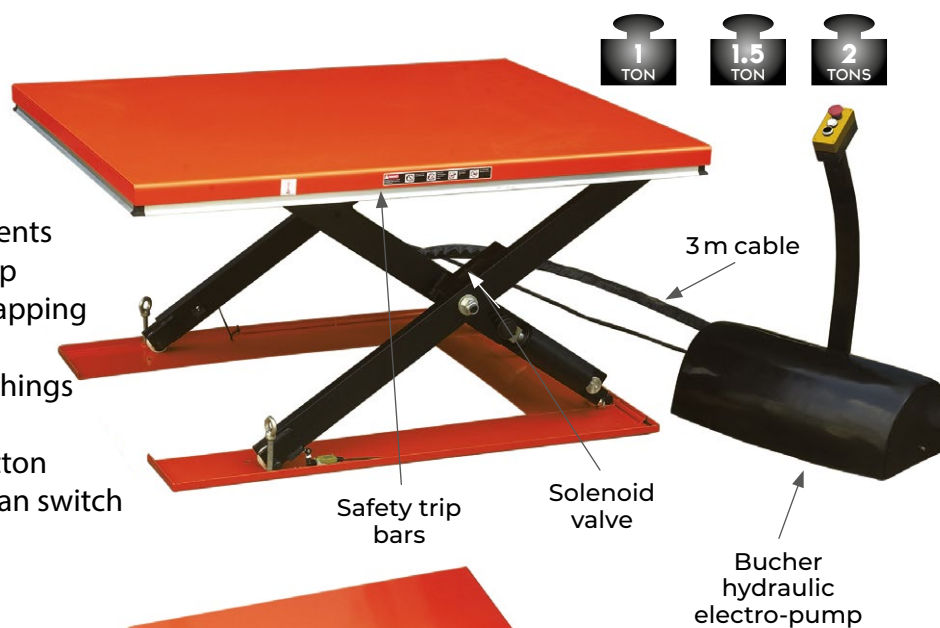


IN OPTION

- Self-leveling function (when ordering, please specify the desired adjustment)
- 220 volts single-phase



BUCHER HYDRAULIC
ELECTRO-PUMP



SAFETY
TRIP BARS



HAND CONTROLLER
WITH 3M CABLE



UPPER TRAVEL
LIMIT SWITCH



Model 1000 kg		HY1001	HY1002	HY1003	HY1004	HY1005
Load capacity	kg	1000	1000	1000	1000	1000
Plate dimensions (LxW)	mm	1450x1140	1600x1140	1450x800	1600x800	1600x1000
Min / max lift height	mm	85/860	85/860	85/860	85/860	85/860
Raising time	s	25	25	25	25	25
Stroke	mm	775	775	775	775	775
Motor 380V / 50 Hz	kw	1,1	1,1	1,1	1,1	1,1
Weight	kg	357	364	326	332	352

Model 1500 kg		HY1501	HY1502	HY1503
Load capacity	kg	1500	1500	1500
Plate dimensions (LxW)	mm	1600x800	1600x1000	1600x1200
Min / max lift height	mm	105/870	105/870	105/870
Raising time	s	30	30	30
Stroke	mm	775	775	775
Motor 380V / 50 Hz	kw	1,5	1,5	1,5
Weight	kg	362	401	415

Model 2000 kg		HY2001	HY2002
Load capacity	kg	2000	2000
Plate dimensions (LxW)	mm	1600 x 1200	1600x1000
Min / max lift height	mm	105/870	105/870
Raising time	s	35	35
Stroke	mm	775	775
Motor 380V / 50 Hz	kw	2,2	2,2
Weight	kg	419	405

**220 VOLT
SINGLE-PHASE
COMES STANDARD
ON HY1001 AND
HY1003 MODELS**